

## EI-V150150 Multi-Energy X-Ray Security Inspection Equipment



### Product Instruction

Eastimage is a world's leading security equipment supplier headquartered in Shanghai, using the high cost-effective security products and the professional security solutions as our significant characteristics to stand out from the industry.

EI-V150150 is a practical large tunnel design x-ray security equipment which has been widely applied for railways, transportation operations, logistics and other cargo security inspection.

EI-V150150 has heavy duty capability through stainless steel rollers and high mobility (and could be easily move to any locations which need the security inspection) through rolling casters.

EI-V150150 is an ideal model for cargo, freight scanning because of its advanced image processing platform and various image processing functions.

### Technology Features

- ◆ Shiny clear images
- ◆ Sophisticated design with multi-functions operator interface
- ◆ High- resolution
- ◆ Can increase the conveyor speed to 0.3m/s(Customized)
- ◆ Collection the high-speed parallel of detection data
- ◆ With network interface to achieve total network management
- ◆ Support JPG & BMP image transformation format to USB

### Applications

- ◆ Airport
- ◆ Port
- ◆ Bus Station
- ◆ Logistics Warehouse
- ◆ Custom

## General Specification

- Tunnel size.....1500 mm (W) x 1505 mm (H)
- Conveyor Speed.....0.2 m/s
- Conveyor Height.....352 mm
- Max. Load.....2000 kg (Evenly distributed)
- Resolution.....Typical: AWG 36      Standard: AWG 34
- Penetration(Steel).....Typical: 43 mm      Standard: 40 mm
- Spatial Resolution.....Horizontal: Φ1.3 mm      Vertical: Φ1.3 mm
- Image Resolution.....22"LED (Single Display)

## Image Processing System

- Display.....Black / White, Color
- Processing Function.....F1/F2/F3 self-definition combination, edge enhancement, negative, partial enhancement, gray scale scan.
- Saves Capacity & Pull back.....100,000 images / infinite review (the previous pictures)
- Resolution.....1680 × 1050
- Processing & Gray Scale.....24Bit real-time processing/65536
- Enlargement.....Up to 64X dynamic continuous zoom & panning

## X-Ray Generator


- Anode Voltage.....200 KV (adjustable)
- Beam Direction.....From side
- Cooling & Running Cycle.....Sealed oil cooling & 100%
- X-Ray Sensor.....Multi-energy L photoelectric diode array detector

## IPC Configuration

- Standard Function.....Win7; RAM: 2GB; Hard Disk: 500G; Video Card: 2G;
- Optional Function.....RAM: 4G、8G、16G; Hard Disk: 1T、2T; Video Card: 4G、8G;

## X-Ray Security

- Leakage.....< 1μGy/h (5cm distance from outer), According to the national and international Safety standard
- Film Safty.....According to the ISO1600 (33DIN) High speed standard

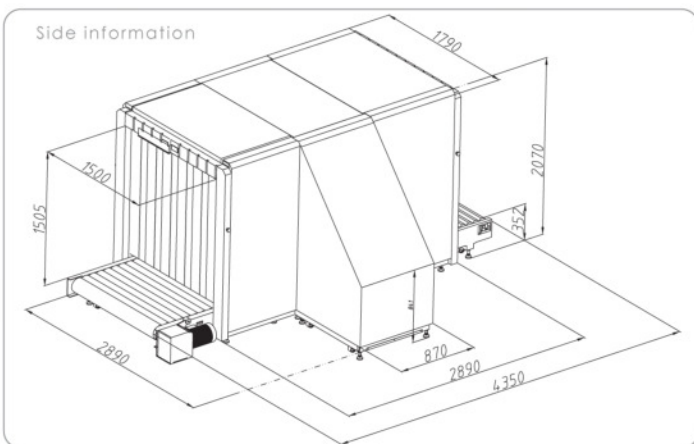

## System Function

- Alarm Function
- Browse
- Fault Self-diagnosis and Maintenance Functions
- Image Navigation
- Limits of Authority Management for Operator
- System Working Timing
- TIP
- User Management
- Urgent Stop
- Working Status Display
- Image Split Joint
- Single-directional Scanning
- Date & Time Display
- High Density Alarm
- Image Magnification Display
- Luggage Counting
- Network Interface
- One-key Shutdown
- Self-check Power-on
- Save and Retrieval
- Save As
- X-Ray Emission Timing
- X-Autosight

## Optional Function

- Bi-directional Scanning
- EI-BB100 Black Box
- OTP The Operator Training Program
- Voltage Stabilizer
- Voice Recording Function
- Double Display
- UPS Uninterruptible Power Supply
- 1.2m Roller type Roller Tables
- Voice Announcement Function

## Black Box

- Using the professional video equipment, EI-BB100 can combine x-ray image, specific package and its owner into one system, to help operators review and analysis after crisis. With this extended function, the operators can quickly target the potential suspects. This system is not only user friendly but also has the remarkable effects which win the warm praise from the public security police officers.

EI-BB100 is an international advanced product and an innovation in the security industry, Shanghai Eastimage has the exclusive patents.



## Installation Data

- Size.....4350 mm (L) x 2890 mm (W) x 2070 mm (H)
- Weight.....3000 KG
- Working Temperature / Humidity.....0 C ~+ 45 C / 10% ~ 95% (non-condensing)
- Storage Temperature / Humidity.....- 40 C ~+ 60 C / 10% ~ 95% (non-condensing)
- Power Supply.....AC 220V or AC 380V(+10%~-15%) 50±3 (Hz)
- Power consumption.....About 2.30 (KVA)

## Health And Safety

Remark: above data base on National Standard GB15208.2

According to the national standard of the People's Republic of China GB15208.1-2005 and the international standards for radiation safety.

The copyright belongs to EastImage Equipment Co. Ltd Shanghai, China, Our products have domestic and international patents, must be strictly investigate if any parties copy the design and technology in future.



Our company has won QMS "ISO9001: 2008", EMS "ISO 14001:2004", OHSMS"GB/T28001-2011". EI-V150150 won"EU CE certification", "U.S.A FCC certification".

ISA Building, #122 P. Cruz Street, Brgy. San Jose, Mandaluyong City 1550  
 Pilotline: (02) 535-3535 | Inquiry Hotline: (02) 925-3230  
 Cell Sun: (0925) 727-1555 | Cell Globe: (0917) 727-1555

info@isa.com.ph / www.isa.com.ph



Integrated Security and Automation, Inc.

ONE-1-STEP AHEAD